




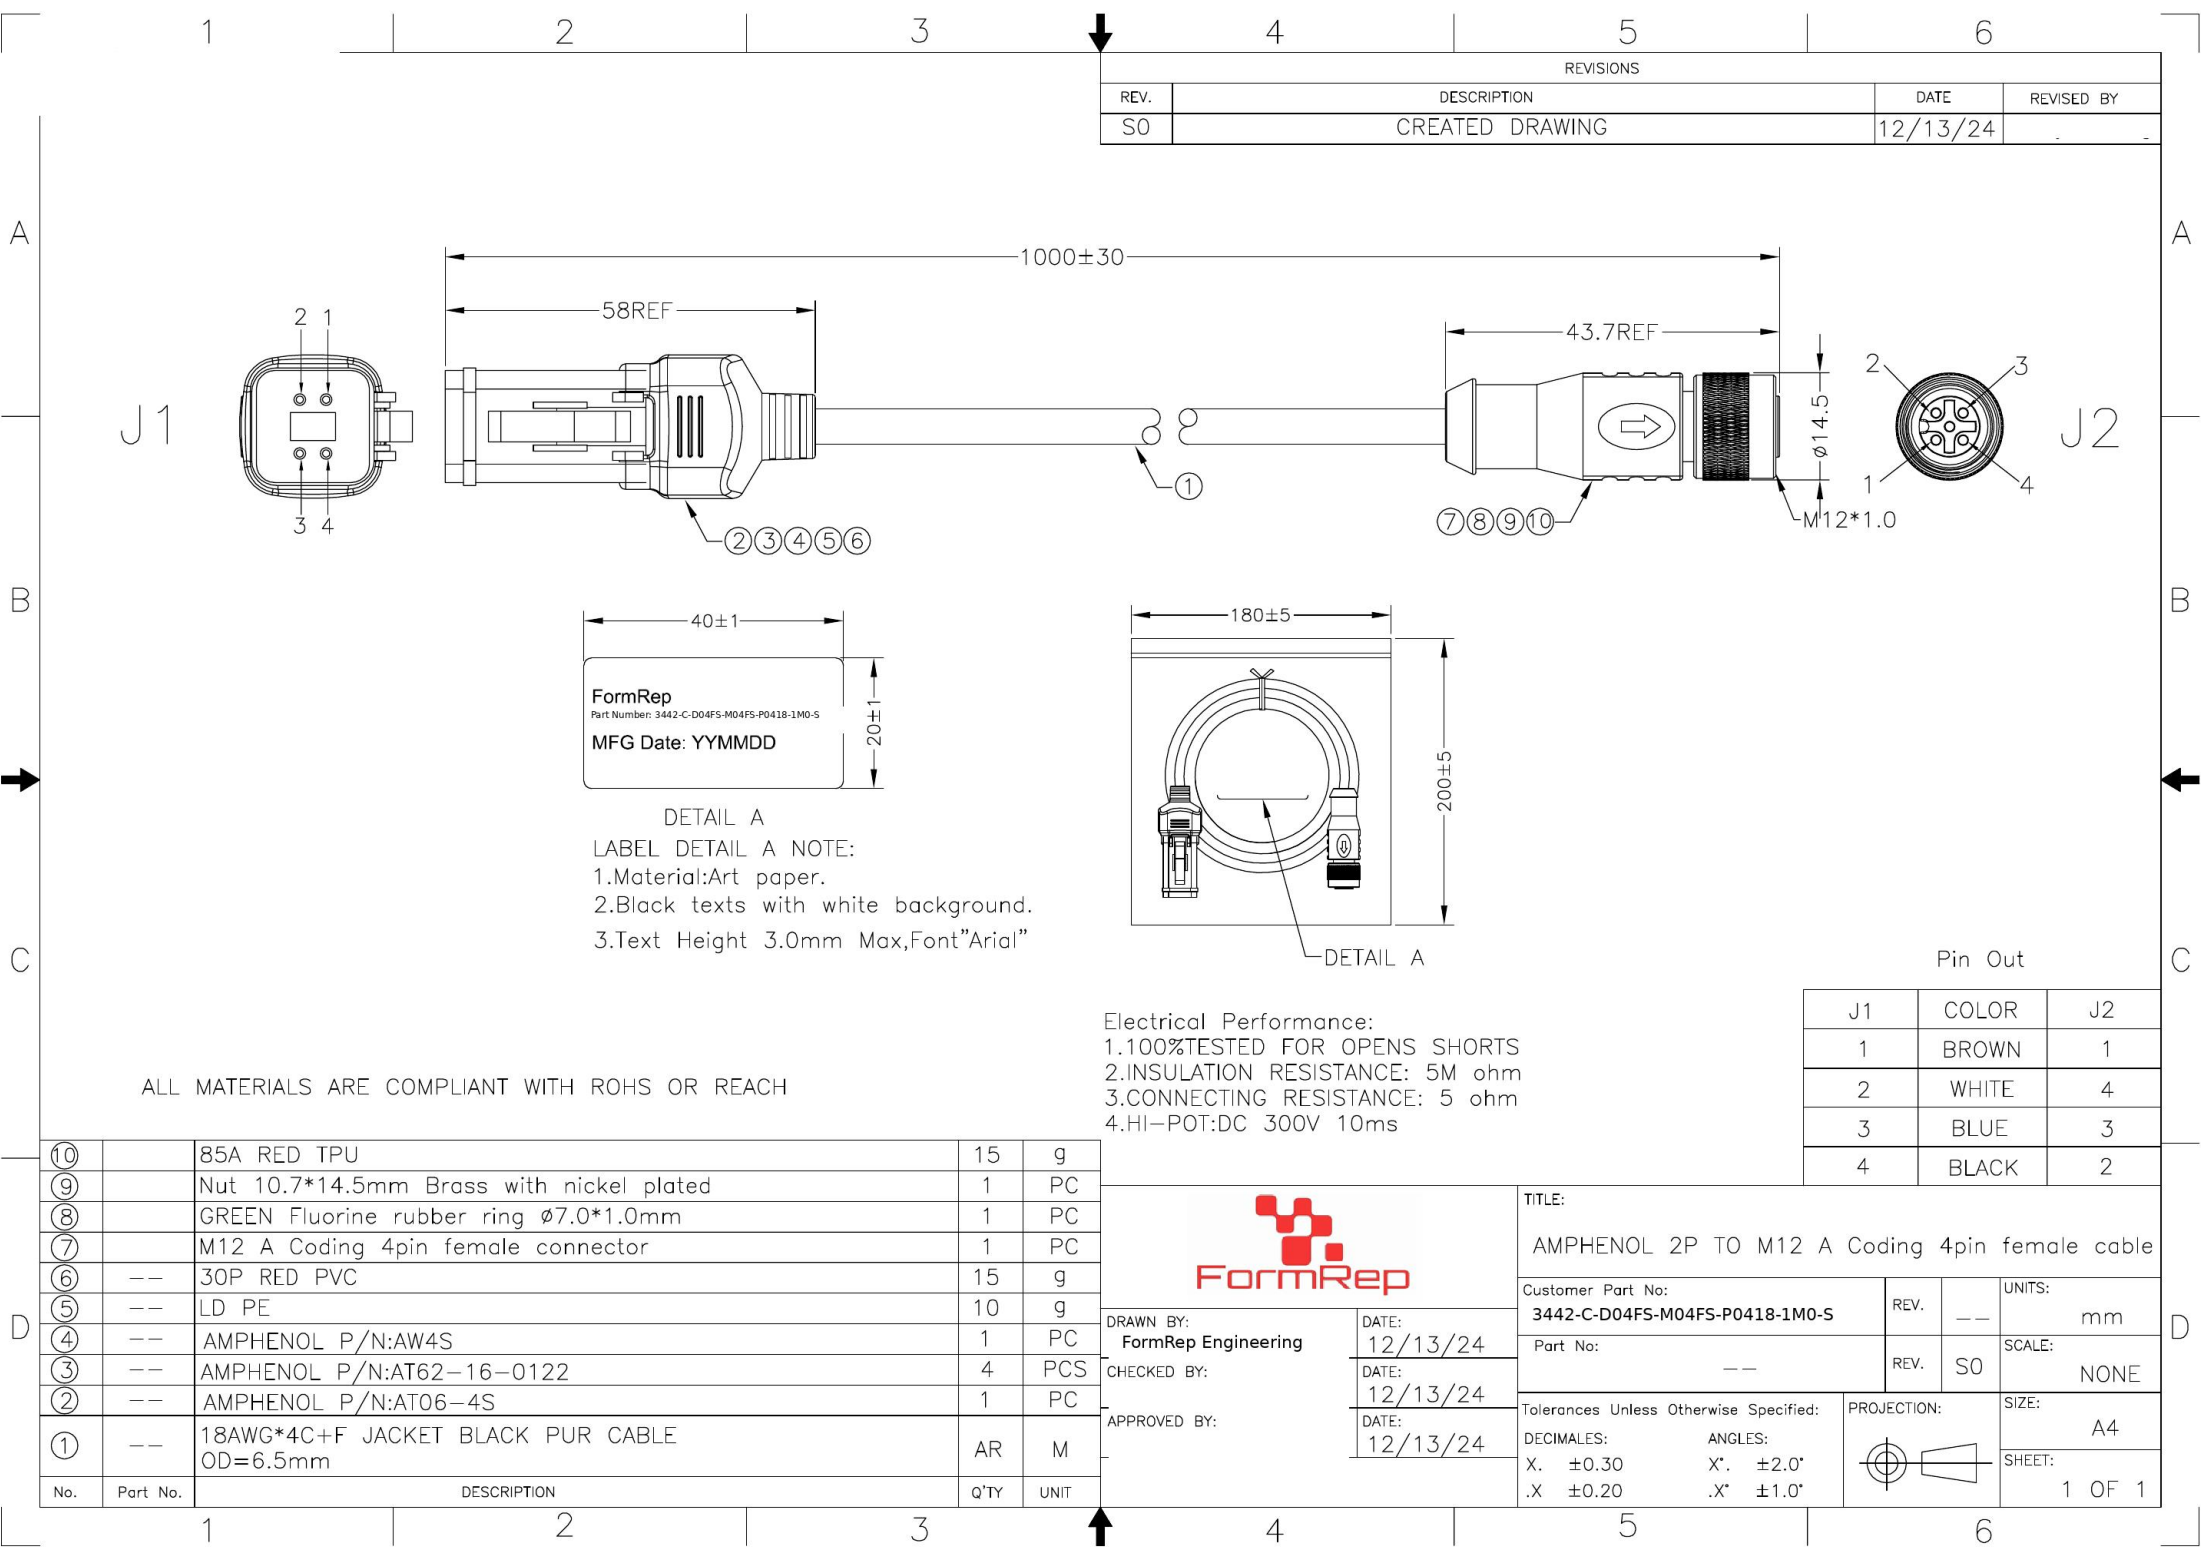

REVISIONS			
REV.	DESCRIPTION	DATE	REVISED BY
S0	CREATED DRAWING	12/13/24	



DETAIL A
LABEL DETAIL A NOTE:
1.Material:Art paper.
2.Black texts with white background.
3.Text Height 3.0mm Max,Font"Arial"




DETAIL A

Pin Out		
J1	COLOR	J2
1	BROWN	1
2	WHITE	4
3	BLUE	3
4	BLACK	2

ALL MATERIALS ARE COMPLIANT WITH ROHS OR REACH

⑩		85A RED TPU	15	g
⑨		Nut 10.7*14.5mm Brass with nickel plated	1	PC
⑧		GREEN Fluorine rubber ring $\varnothing 7.0 \times 1.0$ mm	1	PC
⑦		M12 A Coding 4pin female connector	1	PC
⑥	--	30P RED PVC	15	g
⑤	--	LD PE	10	g
④	--	AMPHENOL P/N:AW4S	1	PC
③	--	AMPHENOL P/N:AT62-16-0122	4	PCS
②	--	AMPHENOL P/N:AT06-4S	1	PC
①	--	18AWG*4C+F JACKET BLACK PUR CABLE OD=6.5mm	AR	M
No.	Part No.	DESCRIPTION	Q'TY	UNIT

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

		TITLE: AMPHENOL 2P TO M12 A Coding 4pin female cable				
		Customer Part No: 3442-C-D04FS-M04FS-P0418-1M0-S		REV. --	UNITS: mm	
DRAWN BY: FormRep Engineering		DATE: 12/13/24	Part No: --		REV. S0	SCALE: NONE
CHECKED BY:		DATE: 12/13/24	Tolerances Unless Otherwise Specified: DECIMALES: ANGLES: X. ±0.30 X°. ±2.0° .X ±0.20 .X°. ±1.0°		PROJECTION: 	SIZE: A4
APPROVED BY:		DATE: 12/13/24				SHEET: 1 OF 1