

1

2

3

4



5

6


REVISIONS

REV.	DESCRIPTION	DATE	REVISED BY
S0	CREATED DRAWING	12/13/24	

J1

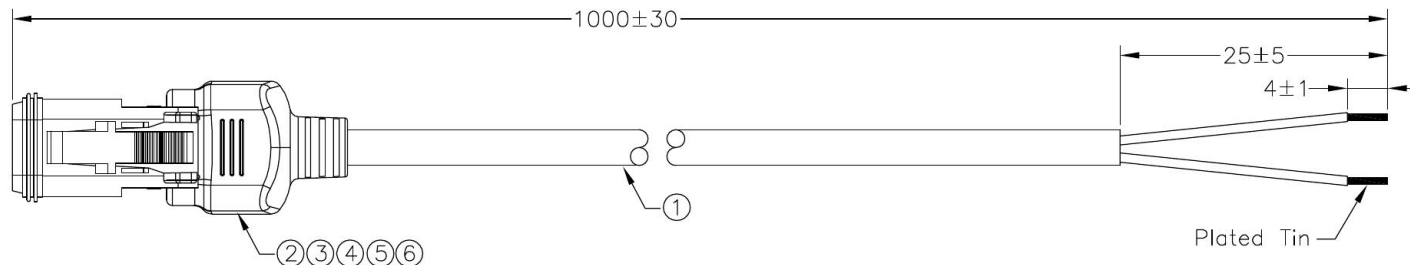


J2



DETAIL A

LABEL DETAIL A NOTE:

- 1.Material:Art paper.
- 2.Black texts with white background.
- 3.Text Height 3.0mm Max,Font"Arial"



DETAIL A

ALL MATERIALS ARE COMPLIANT WITH ROHS OR REACH

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Pin Out

J1	COLOR	J2
1	RED	OPEN
2	BLACK	

⑥	--	30P RED PVC	15	g
⑤	--	LD PE	10	g
④	--	AMPHENOL P/N:AW2S	1	PC
③	--	AMPHENOL P/N:AT62-16-0122	2	PCS
②	--	AMPHENOL P/N:AT06-2S	1	PC
①	--	18AWG*2C+F JACKET BLACK PUR CABLE OD=5.0mm	AR	M
No.	Part No.	DESCRIPTION	Q'TY	UNIT

DRAWN BY:
FormRep EngineeringDATE:
12/13/24

CHECKED BY:

DATE:
12/13/24

APPROVED BY:

DATE:
12/13/24

TITLE:

AMPHENOL 2P cable

Customer Part No:

3446-C-D02FS-FL-P0218-1M0

REV.

--

UNITS:

mm

Part No:

--

REV.

S0

SCALE:

NONE

Tolerances Unless Otherwise Specified:

DECIMALES:

X. ±0.30


.X ±0.20

ANGLES:

X° ±2.0°

.X° ±1.0°

PROJECTION:



SIZE:

A4

SHEET:

1 OF 1