

7/8" 4-Pin Female to Female Cable

Molded 7/8"-16UN 4-pin cable with a female connector on each end, wired pin to pin. 1 to 10 m. 300 V, 8 A.



ORDERING CODE

78-4P-FF-ST-[1M/2M/5M/10M]

CONNECTORS

7/8"-16UN, 4-pin, female both ends

WIRING

Pin to pin, 1-1 ... 4-4

LENGTH

1, 2, 5 or 10 m

RATING

300 V · 8 A

CONSTRUCTION

Connectors	7/8"-16UN, 4-pin female, straight
Contacts	Brass, gold plated
Coupling	Brass, nickel plated
Body	Molded, black
Wiring	1 brown, 2 black, 3 gray, 4 green/yellow

RATINGS

4-pin	300 V · 8 A
-------	-------------

GENERAL

Operating temp.	-40 to +105 °C
Contact resist.	≤ 10 mΩ
Mating cycles	> 100
Compliance	RoHS / REACH


BUILT TO ORDER

Standard versions ship in about 5 to 6 weeks. Request a quote on formrep.com or call 816-782-7800.

NEED SOMETHING DIFFERENT?

Male ends, other lengths or 5-pin versions may be available. Ask for a made-to-fit quote.

Dimensions, wiring and ordering

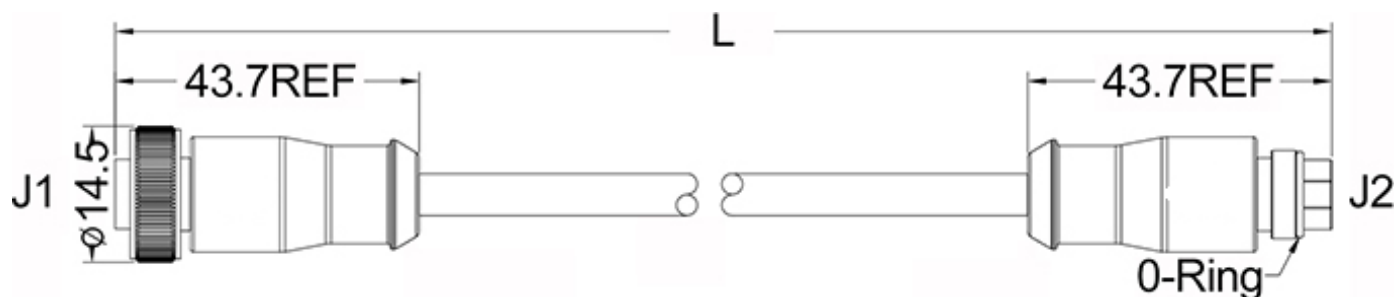

DIMENSIONS

J1 pin	J2 pin	Wire color
1	1	Brown
2	2	Black
3	3	Gray
4	4	Green/Yellow

WIRING

ORDERING CODE

78	-	4P	-	FF	-	ST	-	2M
7/8"-16UN		4 pins		female both ends		straight		1M, 2M, 5M, 10M

Example: 78-4P-FF-ST-5M = 7/8"-16UN 4-pin female to female cable, 5 m.

STANDARD CONFIGURATIONS (4)

78-4P-FF-ST-1M0	78-4P-FF-ST-2M	78-4P-FF-ST-5M	78-4P-FF-ST-10M
-----------------	----------------	----------------	-----------------