

7/8" 5-Pin Female Front Panel-Mount Receptacle, Pre-Wired Leads

7/8"-16UN 5-pin female receptacle that mounts from the front of the panel with a hex nut, with single wire leads 0.3, 0.5 or 1.0 m long. 300 V, 6 A.



ORDERING CODE

78-5P-F-ST-FR-WL-[0M3/0M5/1M0]

CONNECTOR

7/8"-16UN, 5-pin, female

MOUNTING

Straight, front mount, hex nut (SW 28)

TERMINATION

Pre-wired single leads 0.3, 0.5 or 1.0 m

RATING

300 V · 6 A

CONSTRUCTION

Thread	7/8"-16UN
Mounting	Front mount, hex nut SW 28
Termination	Pre-wired single leads
Lead wire	0.14 to 0.34 mm ² (26 to 22 AWG)
Contacts	Brass, gold plated
Shell	Brass, nickel plated
Insert	Yellow

RATINGS

5-pin	300 V · 6 A
-------	-------------

GENERAL

Operating temp.	-40 to +105 °C
Contact resist.	≤ 10 mΩ
Mating cycles	> 100
Compliance	RoHS / REACH


BUILT TO ORDER

Standard versions ship in about 5 to 6 weeks. Request a quote on formrep.com or call 816-782-7800.

NEED SOMETHING DIFFERENT?


Other lead lengths, solder versions and mating cables may be available. Ask for a made-to-fit quote.

Dimensions, pin layout and ordering

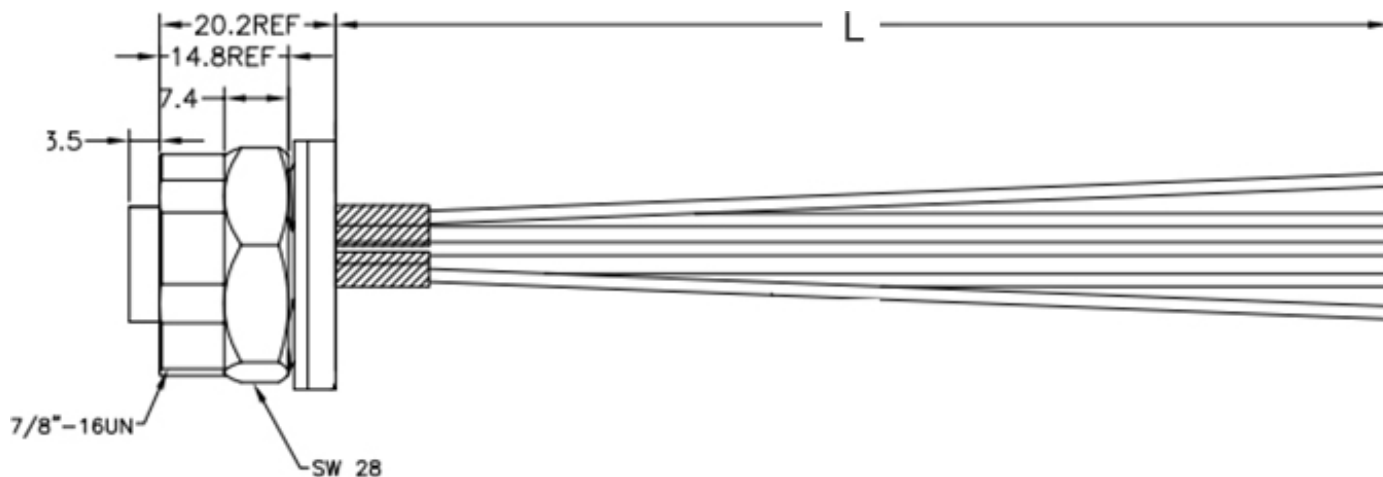

DIMENSIONS

PIN LAYOUT, FACE VIEW (MATING SIDE), FEMALE



ORDERING CODE

78	-	5P	-	F	-	ST	-	FR	-	WL	-	OM5
7/8"-16UN		5 pins		female		straight		front mount		pre-wired leads		OM3, OM5, 1M0 lead

Example: 78-5P-F-ST-FR-WL-OM5 = 7/8"-16UN 5-pin female front panel-mount receptacle with 0.5 m leads.

STANDARD CONFIGURATIONS (3)

78-5P-F-ST-FR-WL-OM3 78-5P-F-ST-FR-WL-OM5 78-5P-F-ST-FR-WL-1M0