



NOTES

- 1. Dimensions in mm. Do not scale.
- 2. Connector: M12 × 1.0, A-coded, female, straight, per IEC 61076-2-101.
- 3. Contacts: phosphor bronze, gold plated. Coupling: brass, nickel plated.
- 4. Overmold: TPU. Seal: FKM.
- 5. Cable: PUR or PVC jacket, unshielded or shielded, per ordering code.
- 6. Free end: open conductors.
- 7. Ordering code:
M12A-[pins]P-F-ST-[PUR/PVC]-[U/S]-[length]M.

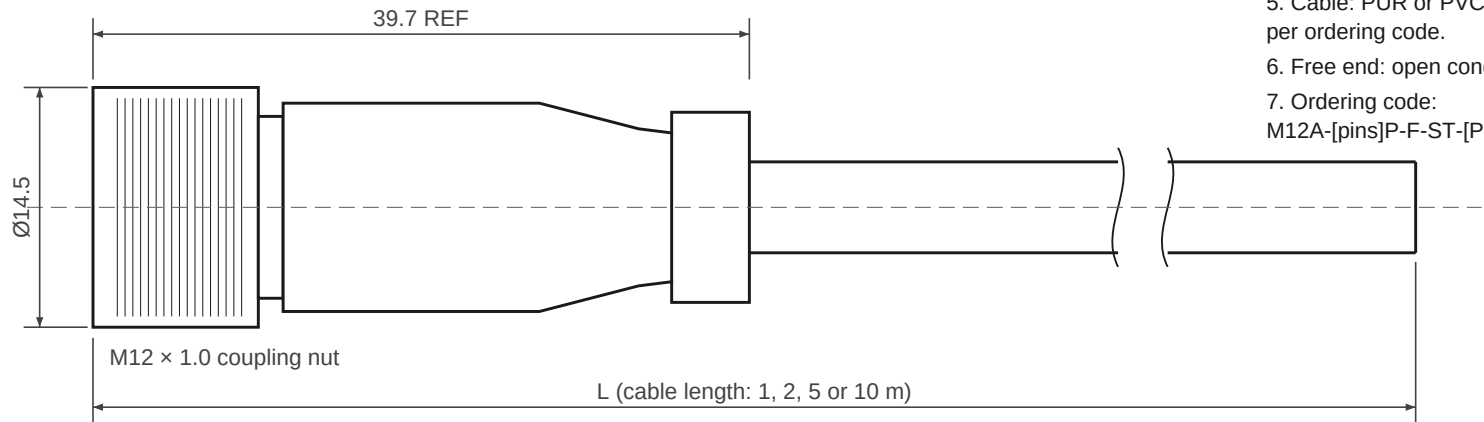

PIN LAYOUTS, FEMALE FACE VIEW (MATING SIDE)

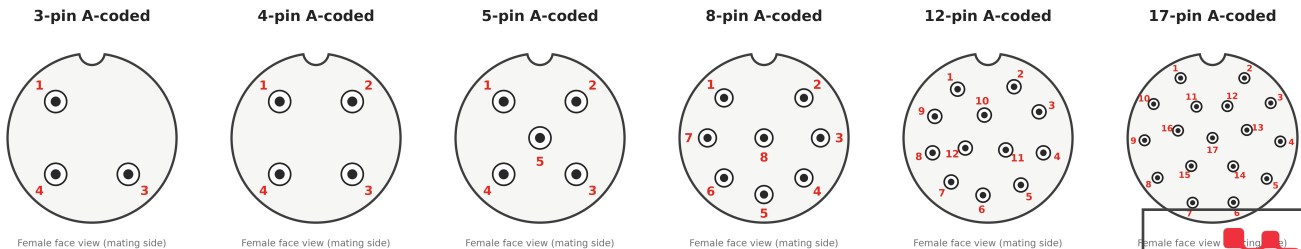


FormRep, St. Joseph, MO
formrep.com · 816-782-7800
Representative drawing.
Subject to change.

TITLE	M12 A-Coded Female Straight Molded Cable, Single-Ended
DWG NO.	M12A-F-ST
REV	B
DATE	2026-10-14
CREATED BY	FormRep
UNITS	mm