

M12 A-Coded Female to Female Straight Cable

M12 × 1.0 A-coded female straight to female straight, overmolded both ends. 3, 4, 5, 8, 12 or 17 pins; 1, 2, 5 or 10 m.



ORDERING CODE

M12A-[pins]P-FF-ST-[jacket]-[U/S]-[length]M

CONNECTOR

M12 × 1.0, A-coded, female, straight to female straight

PINS

3, 4, 5, 8, 12 or 17

CABLE

PUR or PVC jacket · unshielded or shielded

LENGTHS

1 m, 2 m, 5 m, 10 m

OPERATING TEMPERATURE

–40 to +105 °C

CONSTRUCTION

Standard	IEC 61076-2-101
Connector	M12 × 1.0, A-coded, female, straight to female straight
Termination	Soldered and overmolded
Contacts	Phosphor bronze, gold plated
Coupling	Brass, nickel plated
Body / overmold	TPU
Seal	FKM O-ring
Shield (S)	Brass shell, nickel plated
Jacket	PUR or PVC, black
Wiring	Straight through, pin to pin

RATINGS BY PIN COUNT

3-pin	250 V · 4 A
4-pin	250 V · 4 A
5-pin	60 V · 4 A
8-pin	30 V · 2 A
12-pin	30 V · 1.5 A
17-pin	30 V · 1.5 A

GENERAL

Current rating at	40 °C
Operating temp.	–40 to +105 °C
Insulation resist.	≥ 100 MΩ
Contact resist.	≤ 5 mΩ
Mating cycles	> 100
Compliance	RoHS / REACH


BUILT TO ORDER

Standard configurations ship in about 5 to 6 weeks. Request a quote on formrep.com or call 816-782-7800.


NEED SOMETHING DIFFERENT?

Other pin counts, lengths, angled heads and double-ended versions are available. Ask for a made-to-fit quote.

Dimensions, pin layouts and ordering

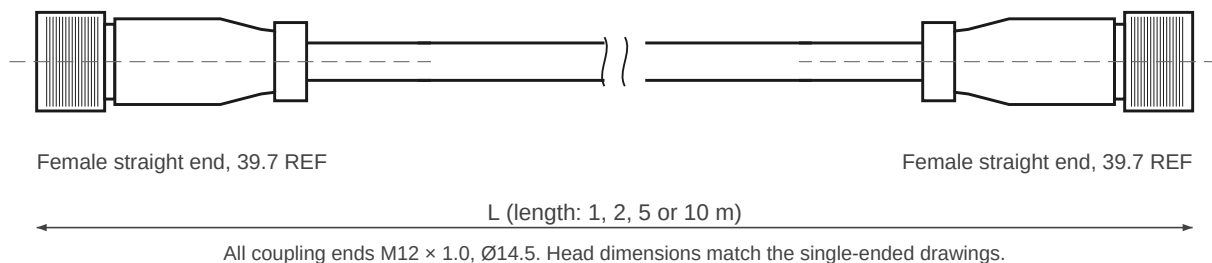

PIN LAYOUTS, FEMALE FACE VIEW, BOTH ENDS (MATING SIDE)

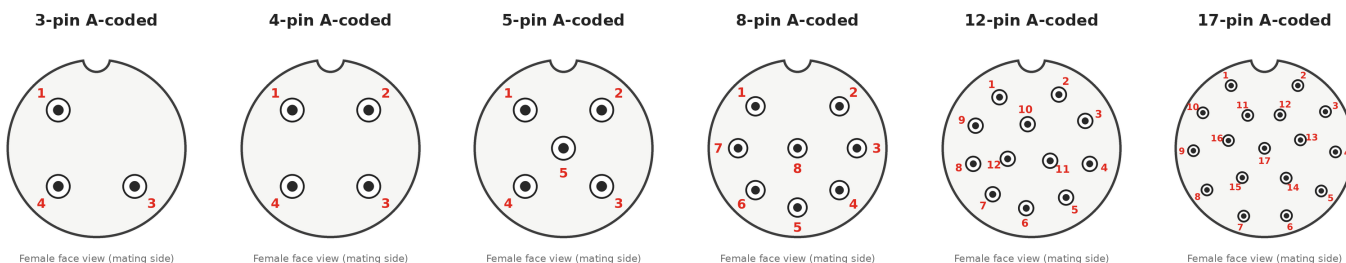

ORDERING CODE

M12A	-	4P	-	FF-ST	-	PUR	-	U	-	2M
M12 A-coded		pins: 3P, 4P, 5P, 8P, 12P, 17P		female, straight to female straight		jacket: PUR or PVC		U = unshielded, S = shielded		length: 1M, 2M, 5M, 10M

Example: M12A-4P-FF-ST-PUR-U-2M = 4-pin A-coded female straight to female straight, PUR jacket, unshielded, 2 m.

STANDARD CONFIGURATIONS (96)

M12A-3P-FF-ST-PUR-U-1M	M12A-4P-FF-ST-PUR-S-1M	M12A-5P-FF-ST-PVC-U-1M	M12A-8P-FF-ST-PVC-S-1M	M12A-17P-FF-ST-PUR-U-1M
M12A-3P-FF-ST-PUR-U-2M	M12A-4P-FF-ST-PUR-S-2M	M12A-5P-FF-ST-PVC-U-2M	M12A-8P-FF-ST-PVC-S-2M	M12A-17P-FF-ST-PUR-U-2M
M12A-3P-FF-ST-PUR-U-5M	M12A-4P-FF-ST-PUR-S-5M	M12A-5P-FF-ST-PVC-U-5M	M12A-8P-FF-ST-PVC-S-5M	M12A-17P-FF-ST-PUR-U-5M
M12A-3P-FF-ST-PUR-U-10M	M12A-4P-FF-ST-PUR-S-10M	M12A-5P-FF-ST-PVC-U-10M	M12A-8P-FF-ST-PVC-S-10M	M12A-17P-FF-ST-PUR-U-10M
M12A-3P-FF-ST-PUR-S-1M	M12A-4P-FF-ST-PVC-U-1M	M12A-5P-FF-ST-PVC-S-1M	M12A-12P-FF-ST-PUR-U-1M	M12A-17P-FF-ST-PUR-S-1M
M12A-3P-FF-ST-PUR-S-2M	M12A-4P-FF-ST-PVC-U-2M	M12A-5P-FF-ST-PVC-S-2M	M12A-12P-FF-ST-PUR-U-2M	M12A-17P-FF-ST-PUR-S-2M
M12A-3P-FF-ST-PUR-S-5M	M12A-4P-FF-ST-PVC-U-5M	M12A-5P-FF-ST-PVC-S-5M	M12A-12P-FF-ST-PUR-U-5M	M12A-17P-FF-ST-PUR-S-5M
M12A-3P-FF-ST-PUR-S-10M	M12A-4P-FF-ST-PVC-U-10M	M12A-5P-FF-ST-PVC-S-10M	M12A-12P-FF-ST-PUR-U-10M	M12A-17P-FF-ST-PUR-S-10M
M12A-3P-FF-ST-PVC-U-1M	M12A-4P-FF-ST-PVC-S-1M	M12A-8P-FF-ST-PUR-U-1M	M12A-12P-FF-ST-PUR-S-1M	M12A-17P-FF-ST-PVC-U-1M
M12A-3P-FF-ST-PVC-U-2M	M12A-4P-FF-ST-PVC-S-2M	M12A-8P-FF-ST-PUR-U-2M	M12A-12P-FF-ST-PUR-S-2M	M12A-17P-FF-ST-PVC-U-2M
M12A-3P-FF-ST-PVC-U-5M	M12A-4P-FF-ST-PVC-S-5M	M12A-8P-FF-ST-PUR-U-5M	M12A-12P-FF-ST-PUR-S-5M	M12A-17P-FF-ST-PVC-U-5M
M12A-3P-FF-ST-PVC-U-10M	M12A-4P-FF-ST-PVC-S-10M	M12A-8P-FF-ST-PUR-U-10M	M12A-12P-FF-ST-PUR-S-10M	M12A-17P-FF-ST-PVC-U-10M
M12A-3P-FF-ST-PVC-S-1M	M12A-5P-FF-ST-PUR-U-1M	M12A-8P-FF-ST-PUR-S-1M	M12A-12P-FF-ST-PVC-U-1M	M12A-17P-FF-ST-PVC-S-1M
M12A-3P-FF-ST-PVC-S-2M	M12A-5P-FF-ST-PUR-U-2M	M12A-8P-FF-ST-PUR-S-2M	M12A-12P-FF-ST-PVC-U-2M	M12A-17P-FF-ST-PVC-S-2M
M12A-3P-FF-ST-PVC-S-5M	M12A-5P-FF-ST-PUR-U-5M	M12A-8P-FF-ST-PUR-S-5M	M12A-12P-FF-ST-PVC-U-5M	M12A-17P-FF-ST-PVC-S-5M
M12A-3P-FF-ST-PVC-S-10M	M12A-5P-FF-ST-PUR-U-10M	M12A-8P-FF-ST-PUR-S-10M	M12A-12P-FF-ST-PVC-U-10M	M12A-17P-FF-ST-PVC-S-10M
M12A-4P-FF-ST-PUR-U-1M	M12A-5P-FF-ST-PUR-S-1M	M12A-8P-FF-ST-PVC-U-1M	M12A-12P-FF-ST-PVC-S-1M	
M12A-4P-FF-ST-PUR-U-2M	M12A-5P-FF-ST-PUR-S-2M	M12A-8P-FF-ST-PVC-U-2M	M12A-12P-FF-ST-PVC-S-2M	
M12A-4P-FF-ST-PUR-U-5M	M12A-5P-FF-ST-PUR-S-5M	M12A-8P-FF-ST-PVC-U-5M	M12A-12P-FF-ST-PVC-S-5M	
M12A-4P-FF-ST-PUR-U-10M	M12A-5P-FF-ST-PUR-S-10M	M12A-8P-FF-ST-PVC-U-10M	M12A-12P-FF-ST-PVC-S-10M	