

M12 C-Coded Male Right-Angle to Female Straight Cable

M12 × 1.0 C-coded 2/3/4/5/6-pin, male right-angle to female straight, overmolded both ends, for sensors and actuators. 1, 2, 5 or 10 m.



ORDERING CODE

M12C-[2/3/4/5/6]P-MRA-FST-[jacket]-[U/S]-[length]M

CONNECTOR

M12 × 1.0, C-coded, male, right-angle to female straight

PINS AND CODING

2/3/4/5/6-pin C-coded · sensors and actuators

CABLE

PUR or PVC jacket · unshielded or shielded

LENGTHS

1 m, 2 m, 5 m, 10 m

CABLE TEMPERATURE

−40 to +105 °C

CONSTRUCTION

Standard	IEC 61076-2-101
Connector	M12 × 1.0, C-coded, male, right-angle to female straight
Termination	Soldered and overmolded
Contacts	Brass, gold plated
Coupling	Screw lock, brass, nickel plated
Overmold	TPU body and overmold
Shield (S)	Brass shell, nickel plated
Jacket	PUR or PVC, black, −40 to +105 °C
Wire gauge	0.14 to 0.75 mm ² range (26 to 18 AWG)
Wiring	Straight through, pin to pin

RATINGS

2-pin C-coded	250 V · 4 A
3-pin C-coded	250 V · 4 A
4-pin C-coded	250 V · 4 A
5-pin C-coded	60 V · 4 A
6-pin C-coded	30 V · 2 A

GENERAL

Current rating at	40 °C
Cable temp.	−40 to +105 °C
Insulation resist.	≥ 100 MΩ
Contact resist.	≤ 5 mΩ
Mating cycles	> 100
Compliance	RoHS / REACH


BUILT TO ORDER

Standard configurations ship in about 5 to 6 weeks. Request a quote on formrep.com or call 816-782-7800.


NEED SOMETHING DIFFERENT?

Other lengths, cable types and mixed-connector versions are available. Ask for a made-to-fit quote.

Dimensions, pin layouts and ordering

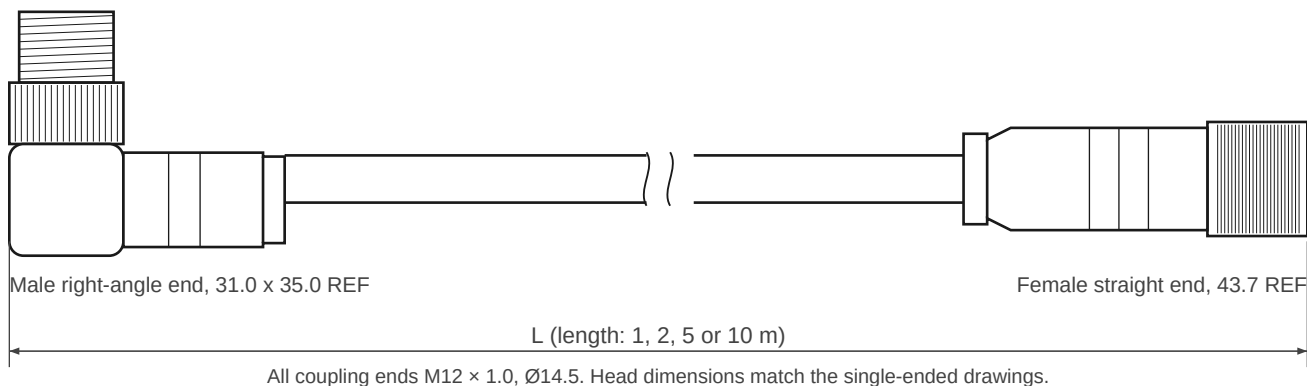

PIN LAYOUTS, MALE END (LEFT) AND FEMALE END (RIGHT), FACE VIEWS

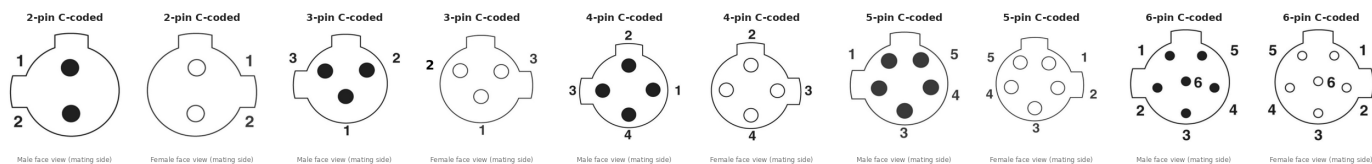

ORDERING CODE

M12C - **2P** - **MRA-FST** - **PUR** - **U** - **2M**

M12 C-coded 2/3/4/5/6 pins this cable family jacket: PUR or PVC U = unshielded, S = shielded length: 1M, 2M, 5M, 10M

Example: M12C-2P-MRA-FST-PUR-U-2M = 2-pin C-coded M12 male right-angle to female straight, PUR jacket, unshielded, 2 m.

STANDARD CONFIGURATIONS (80)

M12C-2P-MRA-FST-PUR-U-1M	M12C-2P-MRA-FST-PVC-S-5M	M12C-3P-MRA-FST-PVC-S-1M	M12C-4P-MRA-FST-PVC-U-5M	M12C-5P-MRA-FST-PVC-U-1M	M12C-6P-MRA-FST-PUR-S-5M
M12C-2P-MRA-FST-PUR-U-2M	M12C-2P-MRA-FST-PVC-S-10M	M12C-3P-MRA-FST-PVC-S-2M	M12C-4P-MRA-FST-PVC-U-10M	M12C-5P-MRA-FST-PVC-U-2M	M12C-6P-MRA-FST-PUR-S-10M
M12C-2P-MRA-FST-PUR-U-5M	M12C-3P-MRA-FST-PUR-U-1M	M12C-3P-MRA-FST-PVC-S-5M	M12C-4P-MRA-FST-PVC-S-1M	M12C-5P-MRA-FST-PVC-U-5M	M12C-6P-MRA-FST-PVC-U-1M
M12C-2P-MRA-FST-PUR-U-10M	M12C-3P-MRA-FST-PUR-U-2M	M12C-3P-MRA-FST-PVC-S-10M	M12C-4P-MRA-FST-PVC-S-2M	M12C-5P-MRA-FST-PVC-U-10M	M12C-6P-MRA-FST-PVC-U-2M
M12C-2P-MRA-FST-PUR-S-1M	M12C-3P-MRA-FST-PUR-U-5M	M12C-4P-MRA-FST-PUR-U-1M	M12C-4P-MRA-FST-PVC-S-5M	M12C-5P-MRA-FST-PVC-S-1M	M12C-6P-MRA-FST-PVC-U-5M
M12C-2P-MRA-FST-PUR-S-2M	M12C-3P-MRA-FST-PUR-U-10M	M12C-4P-MRA-FST-PUR-U-2M	M12C-4P-MRA-FST-PVC-S-10M	M12C-5P-MRA-FST-PVC-S-2M	M12C-6P-MRA-FST-PVC-U-10M
M12C-2P-MRA-FST-PUR-S-5M	M12C-3P-MRA-FST-PUR-S-1M	M12C-4P-MRA-FST-PUR-U-5M	M12C-5P-MRA-FST-PUR-U-1M	M12C-5P-MRA-FST-PVC-S-5M	M12C-6P-MRA-FST-PVC-S-1M
M12C-2P-MRA-FST-PUR-S-10M	M12C-3P-MRA-FST-PUR-S-2M	M12C-4P-MRA-FST-PUR-U-10M	M12C-5P-MRA-FST-PUR-U-2M	M12C-5P-MRA-FST-PVC-S-10M	M12C-6P-MRA-FST-PVC-S-2M
M12C-2P-MRA-FST-PVC-U-1M	M12C-3P-MRA-FST-PUR-S-5M	M12C-4P-MRA-FST-PUR-S-1M	M12C-5P-MRA-FST-PUR-U-5M	M12C-6P-MRA-FST-PUR-U-1M	M12C-6P-MRA-FST-PVC-S-5M
M12C-2P-MRA-FST-PVC-U-2M	M12C-3P-MRA-FST-PUR-S-10M	M12C-4P-MRA-FST-PUR-S-2M	M12C-5P-MRA-FST-PUR-U-10M	M12C-6P-MRA-FST-PUR-U-2M	M12C-6P-MRA-FST-PVC-S-10M
M12C-2P-MRA-FST-PVC-U-5M	M12C-3P-MRA-FST-PVC-U-1M	M12C-4P-MRA-FST-PUR-S-5M	M12C-5P-MRA-FST-PUR-S-1M	M12C-6P-MRA-FST-PUR-U-5M	
M12C-2P-MRA-FST-PVC-U-10M	M12C-3P-MRA-FST-PVC-U-2M	M12C-4P-MRA-FST-PUR-S-10M	M12C-5P-MRA-FST-PUR-S-2M	M12C-6P-MRA-FST-PUR-U-10M	
M12C-2P-MRA-FST-PVC-S-1M	M12C-3P-MRA-FST-PVC-U-5M	M12C-4P-MRA-FST-PVC-U-1M	M12C-5P-MRA-FST-PUR-S-5M	M12C-6P-MRA-FST-PUR-S-1M	
M12C-2P-MRA-FST-PVC-S-2M	M12C-3P-MRA-FST-PVC-U-10M	M12C-4P-MRA-FST-PVC-U-2M	M12C-5P-MRA-FST-PUR-S-10M	M12C-6P-MRA-FST-PUR-S-2M	