# M12 K-Coded Female Right-Angle Molded Cable, Single-Ended

M12 × 1.0 K-coded 5-pin female right-angle connector, overmolded onto PUR or PVC cable for AC power. 1, 2, 5 or 10 m.

ORDERING CODE
**M12K-5P-F-RA-[jacket]-[U/S]-[length]M**

CONNECTOR
**M12 × 1.0, K-coded, female, right-angle**

PINS AND CODING
**5-pin K-coded · AC power**

CABLE
**PUR or PVC jacket · unshielded or shielded**

LENGTHS
**1 m, 2 m, 5 m, 10 m**

CABLE TEMPERATURE
**–40 to +105 °C**

## CONSTRUCTION

| | |
|---|---|
| **Standard** | IEC 61076-2-101 |
| **Connector** | M12 × 1.0, K-coded, female, right-angle |
| **Termination** | Soldered and overmolded |
| **Contacts** | Brass, gold plated |
| **Coupling** | Screw lock, brass, nickel plated |
| **Overmold** | TPU body and overmold |
| **Shield (S)** | Brass shell, nickel plated |
| **Jacket** | PUR or PVC, black, –40 to +105 °C |
| **Wire gauge** | Conductor size set by current; confirm at quote |
| **Free end** | Open conductors |

## RATINGS

| | |
|---|---|
| **5-pin K-coded** | 630 V · 12 A |

## GENERAL

| | |
|---|---|
| **Current rating at** | 40 °C |
| **Cable temp.** | –40 to +105 °C |
| **Insulation resist.** | ≥ 100 MΩ |
| **Contact resist.** | ≤ 5 mΩ |
| **Mating cycles** | > 100 |
| **Compliance** | RoHS / REACH |

**BUILT TO ORDER**
Standard configurations ship in about 5 to 6 weeks. Request a quote on formrep.com or call 816-782-7800.

**NEED SOMETHING DIFFERENT?**
Other lengths, cable types and mixed-connector versions are available. Ask for a made-to-fit quote.

# Dimensions, pin layouts and ordering

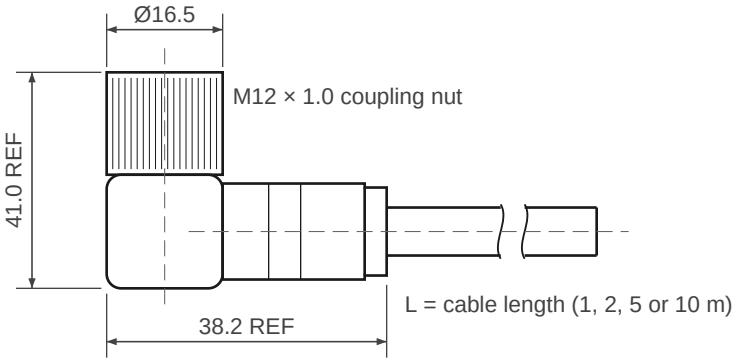


## PIN LAYOUTS, FEMALE FACE VIEW (MATING SIDE)

**5-pin K-coded**




Female face view (mating side)

## ORDERING CODE

| M12K | - | 5P | - | F-RA | - | PUR | - | U | - | 2M |
|---|---|---|---|---|---|---|---|---|---|---|
| M12 K-coded | | 5 pins | | this cable family | | jacket: PUR or PVC | | U = unshielded, S = shielded | | length: 1M, 2M, 5M, 10M |

Example: M12K-5P-F-RA-PUR-U-2M = 5-pin K-coded M12 female right-angle, PUR jacket, unshielded, 2 m.

## STANDARD CONFIGURATIONS (16)

| | | | | | |
|---|---|---|---|---|---|
| M12K-5P-F-RA-PUR-U-1M | M12K-5P-F-RA-PUR-U-10M | M12K-5P-F-RA-PUR-S-5M | M12K-5P-F-RA-PVC-U-2M | M12K-5P-F-RA-PVC-S-1M | M12K-5P-F-RA-PVC-S-10M |
| M12K-5P-F-RA-PUR-U-2M | M12K-5P-F-RA-PUR-S-1M | M12K-5P-F-RA-PUR-S-10M | M12K-5P-F-RA-PVC-U-5M | M12K-5P-F-RA-PVC-S-2M | |
| M12K-5P-F-RA-PUR-U-5M | M12K-5P-F-RA-PUR-S-2M | M12K-5P-F-RA-PVC-U-1M | M12K-5P-F-RA-PVC-U-10M | M12K-5P-F-RA-PVC-S-5M | |