



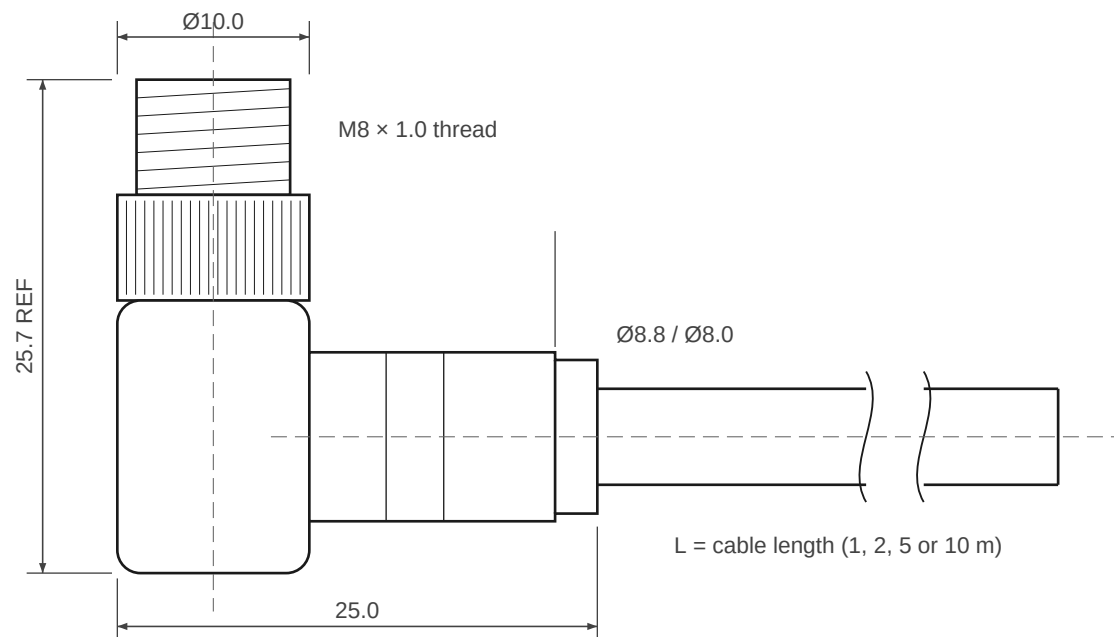

NOTES

1. Dimensions in mm. Do not scale.
2. Connector: M8 × 1.0, male, right-angle, per IEC 61076-2-104. Coding A, B, D or P per ordering code.
3. Contacts: gold plated (male brass, female phosphor bronze). Coupling: brass, nickel plated.
4. Body and overmold: TPU.
5. Cable: PUR or PVC jacket, unshielded or shielded, per ordering code.
6. Free end: open conductors.
7. Ordering code:
M8[coding]-[pins]P-M-RA-[PUR/PVC]-[U/S]-[length]M.

PIN LAYOUTS, MALE FACE VIEW (MATING SIDE)

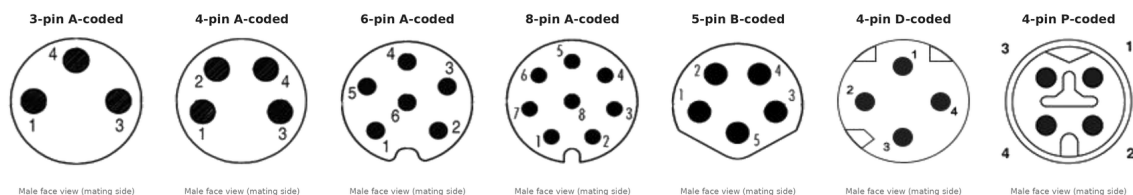

 FormRep, St. Joseph, MO formrep.com · 816-782-7800 Representative drawing. Subject to change.	TITLE	M8 Male Right-Angle Molded Cable, Single-Ended
	DWG NO.	M8-M-RA
	REV	A
	DATE	2026-10-14
	CREATED BY	FormRep
	UNITS	mm