

7/8" 5-Pin Female Cordset, M23 Coupling, Open End

Molded 5-pin female cordset with a 7/8" pin layout and M23 × 1.0 coupling nut on one end and tinned open conductors on the other. 1 to 10 m.



ORDERING CODE

78-5P-F-ST-OE-[1M/2M/5M/10M]

CONNECTOR

7/8" 5-pin female, M23 × 1.0 coupling

FREE END

Open conductors, tinned

LENGTH

1, 2, 5 or 10 m

RATING

300 V · 8 A

CONSTRUCTION

Connector	5-pin female, straight
Coupling	M23 × 1.0, brass, nickel plated
Contacts	Brass, gold plated
Body	Molded, black
Free end	Open conductors, tinned
Conductors	Confirmed at quote

RATINGS

5-pin	300 V · 8 A
-------	-------------

GENERAL

Operating temp.	–40 to +105 °C
Contact resist.	≤ 10 mΩ
Mating cycles	> 100
Compliance	RoHS / REACH


BUILT TO ORDER

Standard versions ship in about 5 to 6 weeks. Request a quote on formrep.com or call 816-782-7800.

NEED SOMETHING DIFFERENT?

Other lengths, jackets or a 7/8"-16UN coupling may be available. Ask for a made-to-fit quote.

Dimensions, pin layout, wiring and ordering

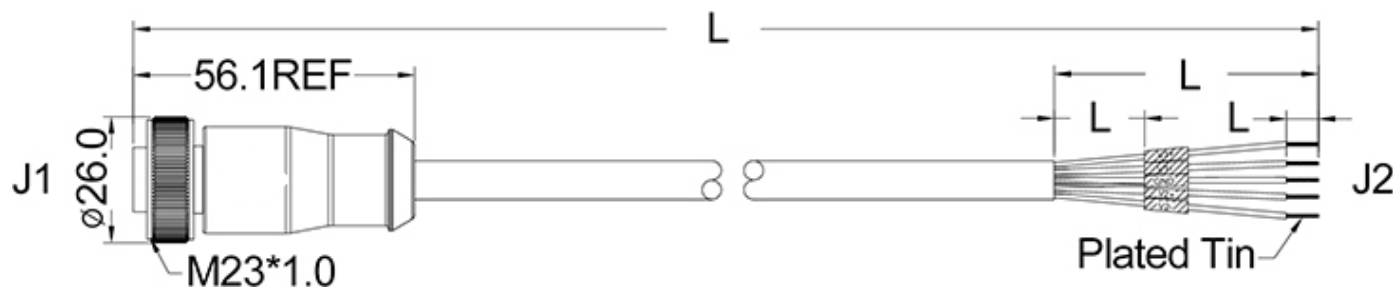


DIMENSIONS

Pin	Wire color
1	Black
2	Blue
3	Green
4	Brown
5	White

WIRING

PIN LAYOUT, FACE VIEW (MATING SIDE), FEMALE



ORDERING CODE

78

- **5P**

- **F**

- **ST**

- **OE**

- **2M**

7/8" layout

5 pins

female

straight

open end

1M, 2M, 5M, 10M

Example: 78-5P-F-ST-OE-2M = 7/8" 5-pin female cordset, open end, 2 m.

STANDARD CONFIGURATIONS (4)

78-5P-F-ST-OE-1M0

78-5P-F-ST-OE-2M

78-5P-F-ST-OE-5M

78-5P-F-ST-OE-10M